



MOSO® Bamboo X-treme® Outdoor Cladding

MOSO® Bamboo X-treme® Cladding is a solid, Thermo-Density® exterior board, made from compressed bamboo strips. A special, unique heat-treatment process at 200°C provides MOSO® Bamboo X-treme® with the highest durability class possible in the appropriate EU norms, increases the stability and density, and consequently the hardness. Furthermore, contrary to other wood products, this material achieves fire resistance Class B-s1-d0 (EN 13501-1) without impregnation with expensive and eco-damaging fire retardants. Bamboo X-treme® Cladding is available in 3 shapes: a rebated profile for installation with MOSO® Fasteners (18 mm) and screws, a closed profile for 'invisible' screw installation and a trapezium profile for installation with screws. Like any tropical hardwood species, when exposed to outdoor conditions, MOSO® Bamboo X-treme® will turn grey over time creating a very natural look.



Rebated profile

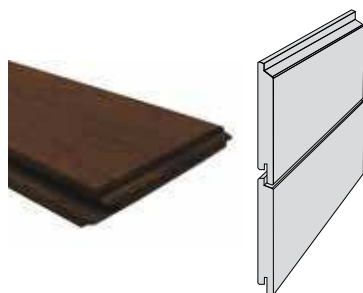

Trapezium profile

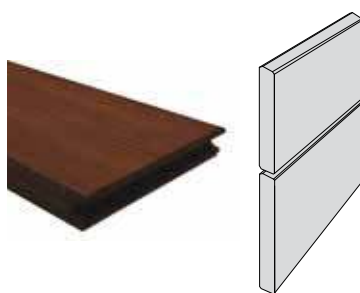

Closed profile

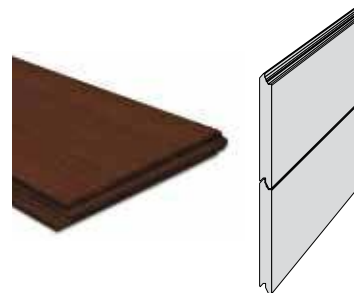

*) Also on ends. **) Effective width without gap between the boards, recommended gap 6 mm.

| Product Code | Shape | Finish | Edges* | Surface | End-matched | Effective width (mm)** | Dimensions (mm) |
|--------------|-------------------|------------|--------|---------|-------------|------------------------|-----------------|
| BO-DTHT500G | Rebated profile | Unfinished | Bevel | Flat | Yes | 128 | 1850x137x18 |
| BO-DTHT510 | Trapezium profile | Unfinished | Bevel | Flat | Yes | 132 | 1850x137x18 |
| BO-DTHT530 | Closed profile | Unfinished | Bevel | Flat | Yes | 124.5 | 1850x137x18 |
| BO-DTHT505G | Rebated profile | Unfinished | Bevel | Flat | Yes | 63 | 1850x75x18 |
| BO-DTHT515 | Trapezium profile | Unfinished | Bevel | Flat | Yes | 70 | 1850x75x18 |
| BO-DTHT525 | Trapezium profile | Unfinished | Bevel | Flat | No | 70 | 1850x75x12 |


installation

- MOSO guarantees the bamboo material and the mounting materials (fastener/screw) it supplies but does not guarantee the connection with other materials (such as sub frame joist/battens). It is the responsibility of the installer to make sure the used screw matches such materials during the full lifetime of the product.
- Store in a cool and dry place away from direct sunlight, and protected from weather influences, dirt and dust.
- Full version available at: ▶ www.moso-bamboo.com/x-treme/cladding

technical characteristics and certifications

- Density: +/- 1150 kg/m³
- Dimensional stability: length: + 0.1%; width: + 0.9% (24 hours in water 20°C)
- Resistance to Indentation - Brinell Hardness: ≥ 9.5 kg/mm² (EN 1534)
- Reaction to fire: Class B-s1-d0 (EN 13501-1) ¹⁾
- Flame spread index: Class A (ASTM E84)
- Thermal emittance: 0.81 (ASTM C1371) ²⁾
- Solar Reflectance (SR): 0.32 (ASTM C1549) ²⁾
- Solar Reflectance Index (SRI): Low 27, Medium 30, High 33 (ASTM E1980) ²⁾
- Modulus of Elasticity: 13565 N/mm² (mean value - EN 408)
- Bending strength: 54.4 N/mm² (characteristic value - EN 408)
- Biological durability: Class 1 (EN 350 / CEN/TS 15083-2), simulated graveyard test / Class 1 (EN 350 / CEN/TS 15083-1)
- Effectiveness against Blue Stain: Class 0 (EN 152)
- Use Class: Class 4 (EN 335)
- CO₂ neutral: LCA report TU Delft (ISO 14040/44) (www.moso-bamboo.com/lca)
- Environmental Product Declaration - EPD (EN 15804) (www.moso-bamboo.com/epd)
- FSC®: Products available with FSC® certification on request.
- Contribution LEED BD+C - v4: MR 1, MR 2, MR 3 (FSC®), SS 7 v2009: MR 6, MR 7 (FSC®)
- Contribution BREEAM: MAT 1, MAT 3 (FSC®), MAT 5 (HD)
- Guarantee: 25 years

¹⁾ Tested on 18 mm thickness, without gaps between boards, with ventilation space behind boards.
²⁾ Tested on 3 years weathered MOSO® Bamboo X-treme®.

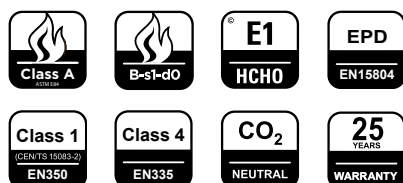

breeam